



9/08261, LH
Lock illustrated.
Cylinder is fitted
into the body and
secured by screw
shown.



A20

'M69' SERIES ADD-ON SECURITY DEADLOCKS

Originally designed by Yale, the 'M69' is well-known within the security industry, where it is used to provide additional protection for motor vehicle doors. There are five lengths of lock cylinder to suit different door thicknesses, fitting into LH and RH standard cases.



Operating bolt throws into striker in door post, and is held positively by action of lock cylinder.



Key is turned through 360° to throw and withdraw deadbolt. Keys can be withdrawn in either mode. Bolt withdraws fully flush into case.



With components separated, case is sunk into door-edge, mortice fashion. Cylinder is inserted through aperture cut in door panel and is engaged into top face of case. It is then screwed fully into position using two holes in lock face. Finally, set-screw on flange is tightened, and pegs may be driven into face to seal fixing holes. Striker is fitted to door-post, and a trim-escutcheon is provided.



Brass pin-tumbler lock with up to 1000 combinations. Unshuttered. Brass keys, nickel plated in 'SX' series



Chromium-plated throughout.



Lock and cylinder are brass, case is zinc diecast with steel cover plate and brass extruded bolt. Steel striker and escutcheon.



- Standard key cylinder
- Available as pairs/sets


ORDERING CODE

9/08250	M69	RH	(3/4")
9/08251	M69	LH	(3/4")
9/08252	M69	pair	(3/4")
9/08260	M69	RH	(1")
9/08261	M69	LH	(1")
9/08262	M69	pair	(1")
9/08270	M69	RH	(1 1/4")
9/08271	M69	LH	(1 1/4")
9/08272	M69	pair	(1 1/4")
9/08280	M69	RH	(1 1/2")
9/08281	M69	LH	(1 1/2")
9/08282	M69	pair	(1 1/2")
9/08290	M69	RH	(2")
9/08291	M69	LH	(2")
9/08292	M69	pair	(2")
5/01464	Striker plate, chrome		
5/01465	Escutcheon, chrome		

Dimensions of cylinders ('G')

Ref.	Description	Dimension 'G'
5/01480	3/4" cylinder	15 mm
5/01481	1" cylinder	21 mm
5/01482	1 1/4" cylinder	28 mm
5/01483	1 1/2" cylinder	35 mm
5/01484	2" cylinder	48 mm

SPECIFICATION

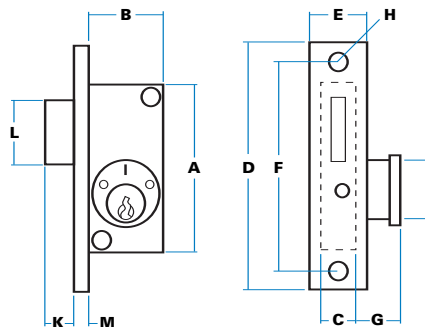

A Case length	54 mm
B Case width	24 mm
C Case depth	11 mm
D Flange length	80 mm
E Flange depth	18 mm
F Hole centres	67 mm
G Height when fitted	(variable)
H Hole sizes	c/s 7 mm dia. 4 mm
J Cylinder diameter	19 mm
K Bolt width ('throw')	10 mm
L Bolt length	21 mm
M Flange width	5 mm

Note: Striker plates & escutcheons are included with locks