





**7/01905**  
Locating plate

**9/00589**

**ORDERING CODE**

<b>9/00589</b>	30 mm lock, 90° mixed keys
<b>9/00589/01</b>	30 mm lock, 90°, FS 880
<b>9/00590</b>	30 mm lock, 180°, mixed keys
<b>9/00590/01</b>	30 mm lock, 180°, FS 880

7/1905, spiked locating plate for wooden panels Panel-piercing detail




Offset aperture by 45° to compensate for orientation of keyway

<b>G</b>	Diameter, locating plate	34 mm
<b>H</b>	Piercing, across flats	17.5 mm
<b>J</b>	Piercing, diameter	20 mm

**SPECIFICATION**

For clarity, retaining nut is not shown

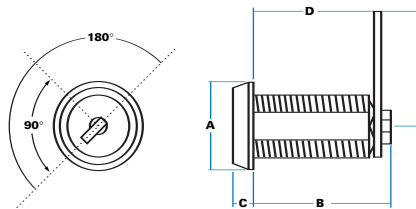

<b>A</b>	Head diameter	26 mm
<b>B</b>	Total depth	35 mm
<b>C</b>	Head projection	8 mm
<b>D</b>	Depth to latch	30 mm
<b>E</b>	Height of bar	35 mm

Latch bar can be fitted at 45° intervals and must be removed for mounting

**'LONG BODY'  
LOCKS (30mm)  
with 90° KEY-  
WITHDRAWAL**

With extended body depth to 30 mm, these locks are ideal for thick panels (chipboard, composites), and keys can be withdrawn in locked and unlocked positions with both 90° and 180° models.

Locks have 'shuttered' keyway for weather protection, with spiked locating plate and straight latch bar.




Keyway is oriented at 45° to 'flats' on body: adjust panel-piercing to compensate or use round hole with spiked locating plate..



'FS' keys as standard with 'shuttered' keyway. Optionally 'FT', '92' or 'DLP' key types.



Wide choice of latch bars, finish options and accessory items. Special key numbers or sets on request.

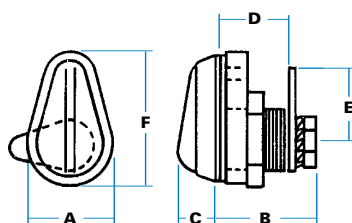

**7/08996**

**ORDERING CODE**

<b>7/08996</b>	'Weathershield' lock, 90°, 'FS'
<b>7/08996/01</b>	'Weathershield' lock, 90°, FS 880
<b>9/00849</b>	'Weathershield' lock 90°, 'FT'

Special latch bar 7/08995 fits at 90° intervals. 180° rotation to special request.

**SPECIFICATION**

<b>A</b>	Max. width (face)	25 mm
<b>B</b>	Total depth	27 mm
<b>C</b>	Head projection	12 mm
<b>D</b>	Depth to latch	19 mm
<b>E</b>	Height of bar	20 mm
<b>F</b>	Max height (face)	38 mm

**'WEATHERSHIELD'  
LOCKS - FOR  
EXTERIOR USE**

A special model, with pivoted diecast cover which protects keyway against dust and water. Normally 90° operation with key withdrawing in both positions. Chrome, with 'FS' or 'FT' keys and full choice of latch bars.



A special piercing is required. Diecast spacer is provided for fitting above or below panel surface as required