




Single-sided 'FS' keys only

1/15134  
'Fluted'  
Non-Locking handle



1/12734  
'Fluted'  
Locking handle

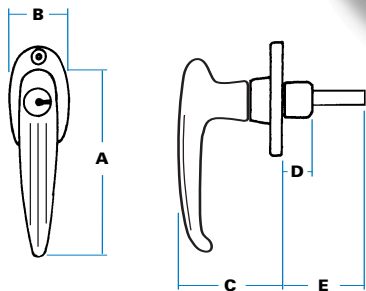

**'TRADITIONAL'  
HANDLES -  
CLASSIC 'PERIOD'  
MODELS**

At one time immensely popular, these handles are now mostly used for restorations and reproductions of classic vehicles. Standard fixing centres are 44mm (1.75 inch) & 36mm (1.43 inch), with alternative mounting escutcheons available, including concealed-fix options.


**ORDERING CODE**

1/12734	'Fluted' handle, locking, chrome (44 mm)
1/12734/01	As above, FS880
1/15134	'Fluted' handle, non-locking, chrome (44 mm)
1/12700	'Fluted' handle, locking, chrome (36 mm)
1/15100	'Fluted' handle, non-locking, chrome (36 mm)

**SPECIFICATION**

<b>A</b>	Handle length	100 mm
<b>B</b>	Mounting width	32 mm
<b>C</b>	Face height	51 mm
<b>D</b>	Depth of handle boss	16 mm
<b>E</b>	Shaft length	125 mm

Fixing centres at 44 mm & 36 mm, standard.

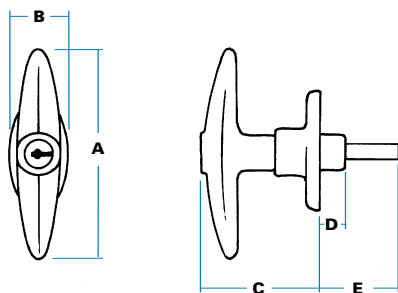

1/16100  
Locking 'T' Handle



**ORDERING CODE**

1/16131	Locking 'T' handle, chrome (44 mm)
1/16131/01	As above, FS880
1/16132	'Non-locking 'T' handle, chrome (44 mm)
1/16100	Locking 'T' handle, chrome (36 mm)
1/16050	Non-locking 'T' handle, chrome (36 mm)

**SPECIFICATION**

<b>A</b>	Handle length	108 mm
<b>B</b>	Mounting width	32 mm
<b>C</b>	Face height	51 mm
<b>D</b>	Depth of handle boss	16 mm
<b>E</b>	Shaft length	125 mm

Fixing centres are 44 mm & 36 mm standard.



Free rotation through 360°, locking at each 90° position.



Fix through countersunk holes or with studs on concealed-fixing versions. Neoprene gaskets provided.



'FS' keys only, with 'shuttered' keyway.



Chromium plated or black powder-coated.



- Shaft lengths
- Threaded shafts
- Special key numbers/sets
- Alternative mounting escutcheons
- Concealed fixing at 36 mm & 40 mm centres.