



Double-sided 'FT' keys only



1/25654 (Right-hand)
The connecting link between 'lock' and 'latch' points 'X' & 'Y' can be clearly seen.

DIECAST FLUSH 'FLAP' HANDLES

A sophisticated design, the 'Flap' handle is easy to fit and is widely used on all types of on-road vehicles. There are two modes of operation, either as a fully self-contained "freewheeling" handle, or with separate "isolated" lock and latch connection points.

ORDERING CODE


'Freewheel' handles

- 1/25654** Flap handle, RH, black & chrome
- 1/25654B** As above, all -black
- 1/25653** Flap handle, LH, black & chrome
- 1/25653B** As above, all-black
- 1/25673** Flap handles, pair, black & chrome
- 1/25673B** As above, all-black

'Isolated' handles

- 1/29344** Flap handle, RH, black & chrome
- 1/29344B** As above, all black
- 1/29345** Flap handle, LH, black & chrome
- 1/29345B** As above, all black
- 1/29346** Flap handles, pair, black & chrome
- 1/29346B** As above, all black



INSIDE VIEW OF HANDLE (LH)

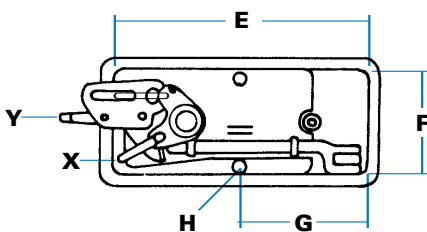

Studs are mounted in diecast bosses to clear operating plunger. Inside rim width is 6 mm. Recommended cut-out size 57 mm x 135 mm. Gasket rim width is 8 mm.

SPECIFICATION

RIGHT-HAND HANDLE ILLUSTRATED

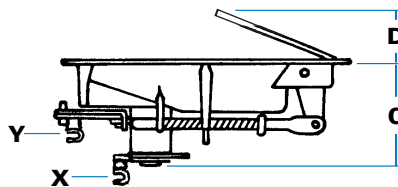

A Case length	145 mm
B Case width	67 mm
C Maximum depth	50 mm
D Maximum flap height	32 mm
E Inside length	133 mm
F Inside width	55 mm
G Location to studs	65 mm
H Studs	10-32 UNF x 10 mm
X Maximum travel of locking point when key is rotated	18 mm
Y Maximum travel of latching point when flap is lifted	15 mm



With "Freewheeling" model, action of the key cylinder disengages latch release via connecting link. With "isolated" model, key cylinder must be connected separately to a suitable latch.



Turn key and lift flap to rotate connection points 'X' and 'Y'. The lock cylinder has 'private lock' movement with 45° 'lost motion'.



Handle is fitted from outside into panel cut-out and is secured against two threaded studs, (nuts supplied) using 'U'-bracket or inner structural member. A moulded gasket is provided.



Double-sided 'FT' keys only.



Black case and chromium-plated flap with 'stippled' finish: alternatively, all black.



Special key numbers/sets 'Customised' keys Colour finishes (volume permitting)