




model with special 50mm 'Extended Hook'



model with standard 36mm hook

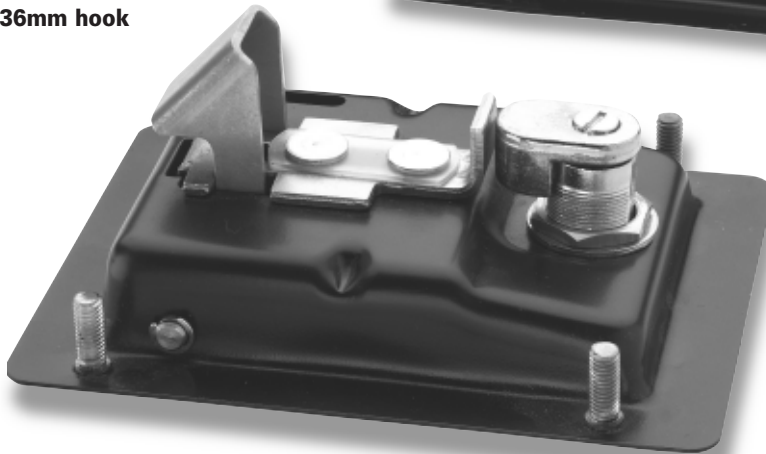

The 'Paddle' concept provides an attractive, fully self-contained lock/latch, which is flush fitting and simple to install

'PADDLES' HOOK-LATCH OPTIONS

Many design options are available with 'paddle' latches. This page shows some of the special features available for slam-bolt models.

Standard 'blind-mounted' models shown below :

ORDERING CODE

Mild steel models, blind-mounting (& gasket)

- 9/00462** Hook-latch paddle, locking
- 9/00462B** As above, black
- 9/00462/01** As 9/00462, FS880 standard keys

9/00462B/01 As above, black

- 9/00463** Hook-latch paddle, non-locking
- 9/00463B** As above, black

Stainless models, blind-mounting (& gasket)

- 9/00472** Hook-latch paddle, locking
- 9/00472/01** As 9/00472, FS880 standard keys
- 9/00473** Hook-latch paddle, non-locking

9/00406 Loop striker (stainless steel)

Blind-mounting models have four studs (M6x15mm) welded on inside rim. Consult engineering drawing for position of studs (not same as holes).

Recommended maximum torque for securing weld-studs is 4.5Nm (3.3ft. lb)

Extended Hook

A special, extended "hook" is now available, (dimension F = 50mm). This offers greater depth of penetration, making these latches a useful equivalent to 'Pommier' models.

Add suffix "/EH" to regular ordering codes.

9/00406 Striker (stainless)

M Total projection	48 mm
N Hole centres	40 mm
O Hole sizes	(dia) 7 mm
P Total width	55 mm
R Total depth	31 mm

Striker made in 6mm diameter stainless rod, welded to stainless backplate. Alternatively it can be supplied without bend (M=80mm) as 9/00406/02.



Blind-mounting, with four studs (M6 x 15mm) welded on inside rim. Consult engineering drawing for position of studs (not same as pierced holes).



Alternative key types ('FT' double-sided keys), '92' series, etc. - Tool-operated plug (triangular, square-drive, etc) - Padlockable loop in flap.



Black powder-coated, or other colours as specified.



'Non-Deadbolt' locking; with this option the paddle will slam even when key cylinder is locked. This is not the normal mode of operation.



Special 'Extended Hook', so that 'F' dimension = 50mm, for greater penetration below surface. Weathershield fitted to lock cylinder

Panel-piercing

See page C10 for details of panel cut-out required

Rotary action paddles

