




**9/02732 with  
6.5mm holes &  
16mm bolt**

### ORDERING CODE

**9/02730** 'Utility' slam latch, 10mm bolt

**9/02732** 'Utility' slam latch, 16mm bolt

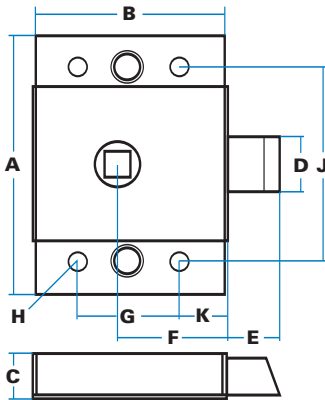

### SPECIFICATION

<b>A</b> Case Length	80 mm
<b>B</b> Case width	60 mm
<b>C</b> Case Height	14 mm
<b>D</b> Bolt width	19 mm
<b>E</b> Bolt projection	10/16 mm
<b>F</b> Location (bush)	34 mm
<b>G</b> Hole centres	36 mm
<b>H</b> Hole sizes	dia 6.5 mm
<b>J</b> Hole centres	62 mm
<b>K</b> Location	14 mm
Bolt withdraws (maximum)	10mm
Bolt-spring pressure for full travel	5Kg

### 'Original' Models

Models below are identical but with mounting holes at 8mm diameter, countersunk to 10mm dia. (centre hole is an assembly feature only).

### ORDERING CODE

**3/17330** 'Utility' slam latch, 10mm bolt

**3/17332** 'Utility' slam latch, 16mm bolt

**9/01372** As 3/17330, bolt 'nose-up'



**3/17332 with  
8mm holes &  
16mm bolt**

# 310

## 'UTILITY' SLAM LATCHES

These well-proven latches have recently been re-designed to reduce size of mounting holes. The 'original' versions are still available when required.

Plant-on latches with central follow-bush which rotates 45° in either direction to withdraw bolt. Can be slammed even when handle is in 'locked' mode. Two lengths of bolt, yellow zinc-plated finish.



Latch slams against striker plate; bolt is released by action of follow-bush.



Latches are non-'handed'. Rotate follow-bush in either direction to withdraw slam-bolt.



Fully plant-on fixings by bolts or rivets through three holes as shown.



Yellow Zinc-plated.



- Bolt fitted 'nose-up'
- Permanently retained inside spindle/handle
- Alternative fixing holes

