

Illustration shows welded studs for concealed fixing.



9/01445 (LH)

9/01444 (RH)

LIFT-OFF CONCEALED-FIX STEEL HINGES

In this design fixing holes are omitted and are replaced with welded-on M8 threaded studs.

This provides an attractive, smooth, and tamper-proof visible surface, in either mirror-polished stainless steel or mild steel, black powder-coated. Left-hand and right-hand available.

! Excellent surface finish, 3 mm material thickness and large-diameter stainless pin for easy assembly.

M Fixing by two threaded studs, 15 mm x M8 on each leaf.

T Rig-tests show that two hinges (on a 1-metre frame) carried a load of 90 Nm (5.28 kN) moment without damage.

ORDERING CODE


- 9/01444 Stainless concealed hinge, RH
- 9/01445 Stainless concealed hinge, LH
- 9/01539 Steel concealed hinge, RH, black
- 9/01538 Steel concealed hinge, LH, black

Dimensions and fixing centres shown opposite

LIFT-OFF ADJUSTABLE STEEL HINGES

These hinges have elongated fixing holes as shown, to allow adjustment when bringing door to meet frame.

All other dimensions and load test results as shown opposite. Stainless steel models only.

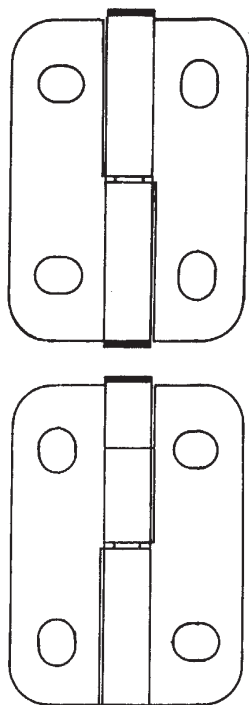

9/01400 (LH)
illustrated

9/01400 (LH)

4 slots, positioned as shown, 11 mm wide x 14 mm long

9/01401 (RH)



ORDERING CODE

- 9/01400 Stainless adjustable hinge, LH
- 9/01401 Stainless adjustable hinge, RH