



9/01526

CONCEALED-FIX MOULDED GRAB HANDLE

Clean, sharp lines characterise this new addition to our range, intended for surface-mount applications where fixing from inside is desired. The handle contains threaded brass inserts, moulded-in during manufacture, and has a relatively high grip for a gloved hand.



Black, fine textured finish




Moulded in Nylon-6, glass-bead filled and UV stabilised



LOAD TESTING:
Tests carried out by an independent proof house gave following results:-
Parallel to fixing: Max load 5.50KN (616kg) before fracture.
Vertical to fixing: Max load 4.50KN (504kg) before fracture.
With ultimate strength over 500Kg we recommend a safe working load of 200Kg (440lbs) max.


ORDERING CODE

9/01526 Concealed-fix handle, black



SPECIFICATION

A Body Length	145 mm
B Body Width	26 mm
C Body Height (max)	43 mm
D Hole centres	117 mm
E Under grip	35 mm
H Hole sizes (depth) with M8 threaded inserts	16 mm

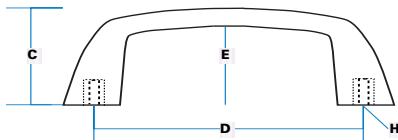

9/01790
'Economy' Grab Handle

'ECONOMY' GRAB HANDLE

A smart, inexpensive handle with 'plant-on' fixing. It is made in black polypropylene with textured finish, with longitudinal ribbing to lighten weight and increase strength.



LOAD TESTING:
Tests carried out by an independent proof house gave following results.
Parallel to fixing: Max load 3.64 Kilo-Newtons (407kg) before handle pulled away from bolts.
Vertical to fixing: Max load 2.87 Kilo-Newtons (321kg) before handle pulled away from bolts.
With ultimate strength over 500Kg we recommend a safe working load of 100Kg (220lbs) max.

ORDERING CODE

9/01790 'Economy' grab handle - open fixing

SPECIFICATION

A Body Length	245 mm
B Body Width	25 mm
C Body Height	40 mm
D Hole centres	203 mm
H Hole sizes c/s	7 mm 12 mm

