


A new left-handed version has recently been developed to suit European and U.S. requirements where fittings are normally on the left-side rear doors.

## ORDERING CODE

- 3/18341** 3-way slam system, left-hand  
**3/18342** 3-way slam system, right-hand  
**3/18343** 2-way slam system, non-handed

Normally supplied in boxed sets of 10 units.  
 All components are provided, including guides (3/18617), strikers (3/12341), rivets (19-7) and wave washers (58-21).

## SPECIFICATION

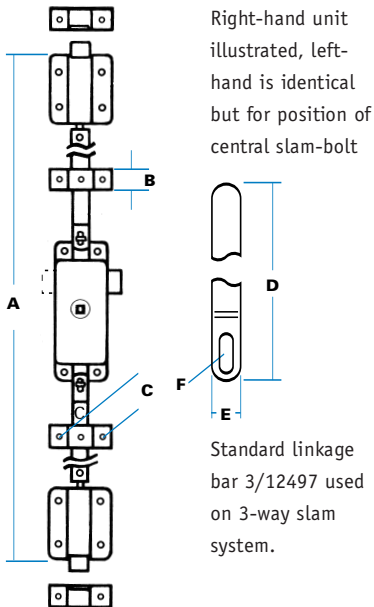

<b>A.</b> Max. Length of system	2057 mm
<b>B.</b> Guide plate width	25 mm
<b>C.</b> Guide hole centres	40 mm
<b>D.</b> Length of linkage bar	915 mm
<b>E.</b> Linkage bar section	12 x 3 mm Cranked 5 mm (rolled edges)
<b>F.</b> 'Free movement' slot	22 mm

All other dimensions shown on individual component pages.  
 Centre bolt withdraws by 11 mm maximum.








# 923

## 2/3-WAY SLAM SYSTEMS

**These versatile systems are assembled on site from standard end-latches, together with centre case (opposite) and connecting bars. The three slam bolts act together and are withdrawn simultaneously.**

Left and right-hand versions are identical apart from position of centre bolt and direction of rotation of centre follow-bush. 2-way versions do not have centre slam-bolt and are non-handed.

-  System slams shut, is opened by inside/outside handle or T-key. It can be slammed even when handle is locked, due to 'free movement' allowed by link bars.
-  Rotation of centre follow-bush withdraws slam bolt fully into case, also withdraws links at each end, which operates slam latches. System is handed by position of centre-bolt and direction of operation of follow-bush.
-  Components are fully plant-on, with 'quick fit' attachment of link bars to centre case. Plain end should be cut and drilled as required: rivets and washers are supplied with kit.
-  Yellow zinc-plated throughout.
- 
  - Centre bolt omitted for 3/18343
  - Bolt can be reversed or extended to special request.
  - Alternative end latches
  - Special link bars to order

