

9/01381
LH illustrated



9/01381 (LH)

9/01380 (RH)

LIFT-OFF MOULDED HINGES

Developed as an alternative to our popular diecast 'torpedo' hinges, this smart design brings all the advantages of modern materials, yet is more economical and fully interchangeable with the diecast models. Left-hand and right-hand available.

! Totally corrosion-resistant, for indoor/outdoor use, textured, self-colour finish, and self-lubricating - will not seize up or bind.

↕ Doors lift-off fixed pin in bottom half of hinge. Use LH and RH together (opposed) when door is required to be permanently fixed.

🔩 Plant-on, and secured through countersunk holes in hinge leaf.

🔨 Black, with matt textured finish.

M Hinges moulded in 15% glass-filled nylon, with 10 mm diameter pin in Grade 303 stainless steel, ultrasonically welded into lower half.

T Rig-tests show that two hinges (on a 1-metre frame) carried a load of 20kg (44lb) without damage, equivalent to a moment of force of 20NM (1.17KN).


£ Highly competitive against market alternatives.

ORDERING CODE

9/01380 Lift-off moulded hinge, RH

9/01381 Lift-off moulded hinge, LH

Explanation of 'handing'




(two hinges should be fitted to each door)

Angle of opening

Hinges will open fully forward to 180°, backward to 45° from horizontal.

SPECIFICATION

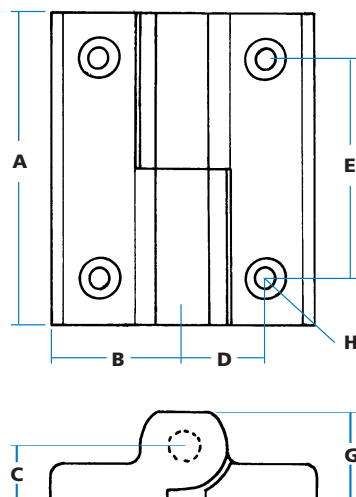

A Length	74 mm
B Width (half)	30 mm
C Height to pin	12 mm
D Location to axis	18 mm
E Hole centres	51 mm
G Height	20 mm
H Hole sizes	(diameter) 5 mm, c/s 9 mm

'Torpedo' hinges

F 6